

## 56RS1 AC/DC Power Supply

### 300-Watt Ruggedized Power Supply Conduction-Cooled, Single Output




#### Description

NAI's 56RS1 is a 300-Watt AC/DC Power Supply that accepts multiple AC inputs or a +270 VDC input. This COTS unit provides a single full-power output at a baseplate temperature of +85°C.

Standard features include remote error sensing; remote digital (TTL) turn on/off; and protection against transients, over voltage, over-current, and short-circuits. Options such as ESS vibration testing and choice of output voltages are available, and additional options and special units can be ordered.

This conduction-cooled power supply is specifically designed with NAVMAT component derating for rugged defense and industrial applications. It is also designed to meet the many harsh environmental requirements of military applications.

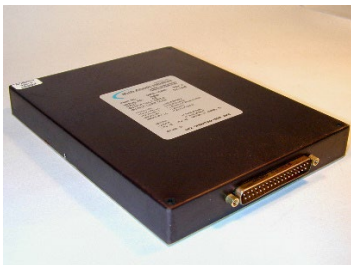

#### Features

- Ideal for rugged, conduction-cooled, military applications
- Standard output voltages: 24V, 28V
- Current Share option available
- Integrated EMI filtering per MIL-STD-461D
- Input transient protection per MIL-STD-704D
- High power density
- Low profile packaging
- Low noise
- Operates at full load through the entire -55°C to +85°C temperature range
- Contact factory for additional options and special units

## Electrical Specifications

AC Input Characteristics	
Input	115/220 VAC (see Input Table, page 3, and Input Connections Table, page 4); 270 VDC: input range of 170 VDC to 355 VDC
Input Frequency Range	47 Hz to 440 Hz
EMI/RFI	Designed to meet the requirements of MIL-STD-461D; CE102
Input Transient Protection	Per MIL-STD-704D; For nominal 115 VAC input: 180 VAC for 0.1 second For nominal 230 VAC input: 292 VAC for 0.1 second
Inrush Current	Limited to 15 times nominal input current
Output Power	300 W (see Output Power and Power Ratings Tables, page 3)
Output Voltage	see Output Power Table, page 3
Efficiency	75% minimum
Output Voltage Tolerance	±1%
Line Regulation	Within 0.1% for low to high line changes at constant load
Load Regulation	0.1% for 0 to 100% of rated load at nominal input line
Power Rating	See Power Ratings Table, page 3
PARD (Noise and Ripple)	50 mV p-p typical; 10 mV p-p maximum for 5 V outputs (20 MHz bandwidth); 1% of the output voltage, with a maximum of 200 V p-p, for all other outputs (20 MHz bandwidth)
Load Transient Recovery	Output voltage returns to regulation limits within 0.5 msec (typical), half to full load
Load Transient Under/Overshoot	0.35 V maximum from nominal output voltage set point for 5 V outputs; all other outputs are 5%
Short Circuit Protection	Under any short circuit condition, continuous short circuit with auto recovery
Current Limiting	120% ±10% typical
Over Voltage Protection	Automatic electronic shutdown if voltage exceeds 125% ±10%
Remote Error Sensing	Compensates for up to 0.5 V drop on output leads
Remote Turn On/Off	TTL logic 1 inhibits (turns off) the output; a floating input acts as a logic 0 (output on)
Current Share (Optional)	Allows for increased system wattage or redundancy by connecting 2 or more units
Isolation Voltage	1000 VDC input to output and input to case; 200 VDC output to case (see Code Table, page 7)
Insulation Resistance	50 Mega Ohm at 50 VDC

All specifications are subject to change without notice.

Physical/Environmental	
Temperature Range	Operating: -55°C to +85° (temperature measured at baseplate, conduction-cooled via baseplate only); Storage: -55°C to +100°C (see Power Ratings Table below)
Temperature Coefficient	0.01% per °C
Shock	30 G's each axis per MIL-STD-810C, Method 516.2, Procedure 1; Hammer shock per MIL-S-901C
Acceleration	6 G's per MIL-STD-810C, Method 513.2, Procedure 11; 14 G's per Procedure 1
Vibration	Per MIL-STD-810C, Method 514.2, Procedure 1A
Reliability (MTBF)	766,000 hours, ground benign, at 50°C baseplate
Humidity	95% at 71°C per MIL-STD-810C, Method 507.1 (non-condensing)
Altitude	40,000 feet per MIL-STD-810C, Method 504.1, Category 6 Equipment
Dimensions	See Mechanical Dimension Tables, page 6
Salt & Fog	Per MIL-STD-810C, Method 509.1
Sand/Dust/Fungus	Per MIL-STD-810C
Enclosure	Aluminum housing to aluminum baseplate (see Mechanical Dimension Tables, page 6)
Finish	Cover: black anodized; Baseplate: chemfilm
Interface	Connections via a D-subminiature (S) connector (see Connector Specifications Table below and Pinout Designations Table, page 4)
Weight	38 ounces max

*All specifications are subject to change without notice.*

### Output Power

Watts	Volts	Amps
300	24	12.5
300	28	10.7

### Connector Specifications

DC Output Voltage	Unit Connector-Series	Mating Connector Series
24 V and 28 V	DCMME37PR	DCMM37S

### Input

Input Power
100 – 126 VAC; 47 – 440 Hz; 1Ø
100 – 126 VAC; 47 – 440 Hz; 3Ø Δ
100 – 126 VAC; 47 – 440 Hz; 3Ø, 4 Y
200 – 252 VAC; 47 – 440 Hz; 1Ø
200 – 252 VAC; 47 – 440 Hz; 3Ø Δ
270 VDC

### Power Ratings at 300 Watts

Input Power	@ 71°C	@ 85°C
115 VAC; 1Ø	100%	75% *(see Note)
115 VAC; 3Ø Δ	100%	100%
115 VAC; 3Ø, 4 Y	100%	100%
230 VAC; 1Ø	100%	100%
230 VAC; 3Ø Δ	100%	100%
270 VDC	100%	100%


**Pinout Designations**

FOR 24 V AND 28 V OUTPUT POWER SUPPLIES – 37 PIN CONNECTOR (J1)					
Pin No.	Function	Pin No.	Function	Pin No.	Function
1	PHASE A	14	+OUTPUT	26	N/C
2	N/C	15	+OUTPUT	27	CHASSIS GND
3	PHASE B	16	+OUTPUT	28	N/C
4	PHASE C	17	-OUTPUT	29	-TTL (ON/OFF)
5	N/C	18	-OUTPUT	30	N/C
6	NEUTRAL	19	-OUTPUT	31	-SENSE
7	N/C	20	PHASE A	32	+OUTPUT
8	N/C	21	PHASE B	33	+OUTPUT
9	N/C	22	N/C	34	+OUTPUT
10	+TTL (ON/OFF)	23	PHASE C	35	-OUTPUT
11	N/C	24	NEUTRAL	36	-OUTPUT
12	CURRENT SHARE	25	N/C	37	-OUTPUT
13	+SENSE				


**Input Connections for J1 Connector (In Conjunction with Above Pinout Designations Table)**

AC Input Type	12 V Output	24 V and 28 V Output
115 VAC, 1Ø	1 & 6, 4 & 9 (Neutral)	1 & 20, 6 & 24 (Neutral)
115 VAC, 3Ø Δ	1 & 6, 2 & 7, 3 & 8	1 & 20, 3 & 21, 4 & 23
115 VAC, 3Ø Y	1 & 6, 2 & 7, 3 & 8, 4 & 9 (Neutral)	1 & 20, 3 & 21, 4 & 23, 6 & 24 (Neutral)
230 VAC, 1Ø	1 & 6, 2 & 7	1 & 20, 3 & 21
230 VAC, 3Ø Δ	1 & 6, 2 & 7, 3 & 8	1 & 20, 3 & 21, 4 & 23
270 VDC	1 & 6 (Positive), 2 & 7 (Return)	1 & 20 (Positive), 3 & 21 (Return)

**Output Wiring Diagram**

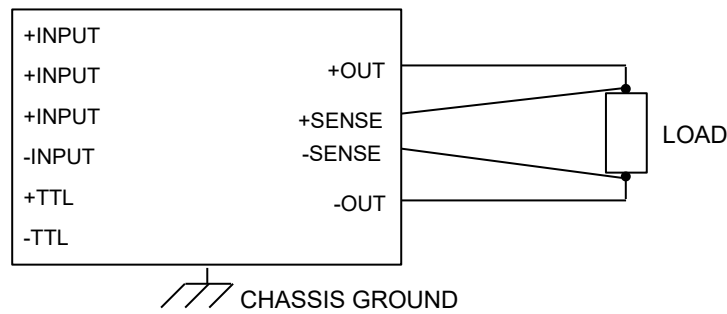

**Mechanical Layout**

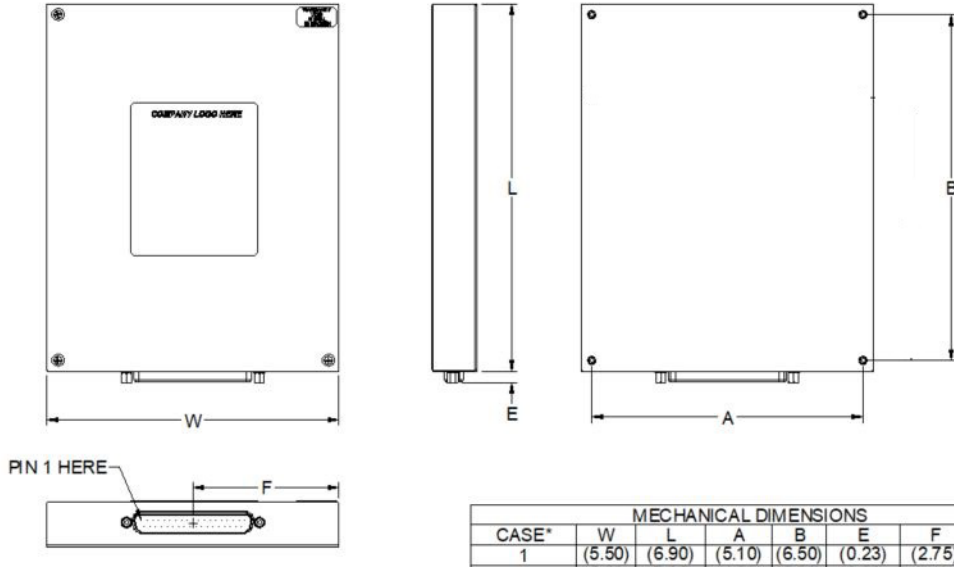

**Mechanical Dimensions**


UNITS	W	L	A	B	F
Inches	5.50	6.90	5.10	6.50	2.75
mm	139.7	175.3	129.5	165.0	69.8

**Additional Dimensions**

Dimension	Inches	Millimeters	Tolerance*	Inches	Millimeters
C & D	0.2	5.1	A	0.01	0.25
E	0.23	5.84	B	0.01	0.25
G	0.455	11.56			
H	0.85	21.6			
J	0.536	13.61			
K	0.85	21.6			
P	4.92	124.9			

*\*Note: Tolerances are 0.03" (0.76mm) except as stated above.*

**Ordering Information**

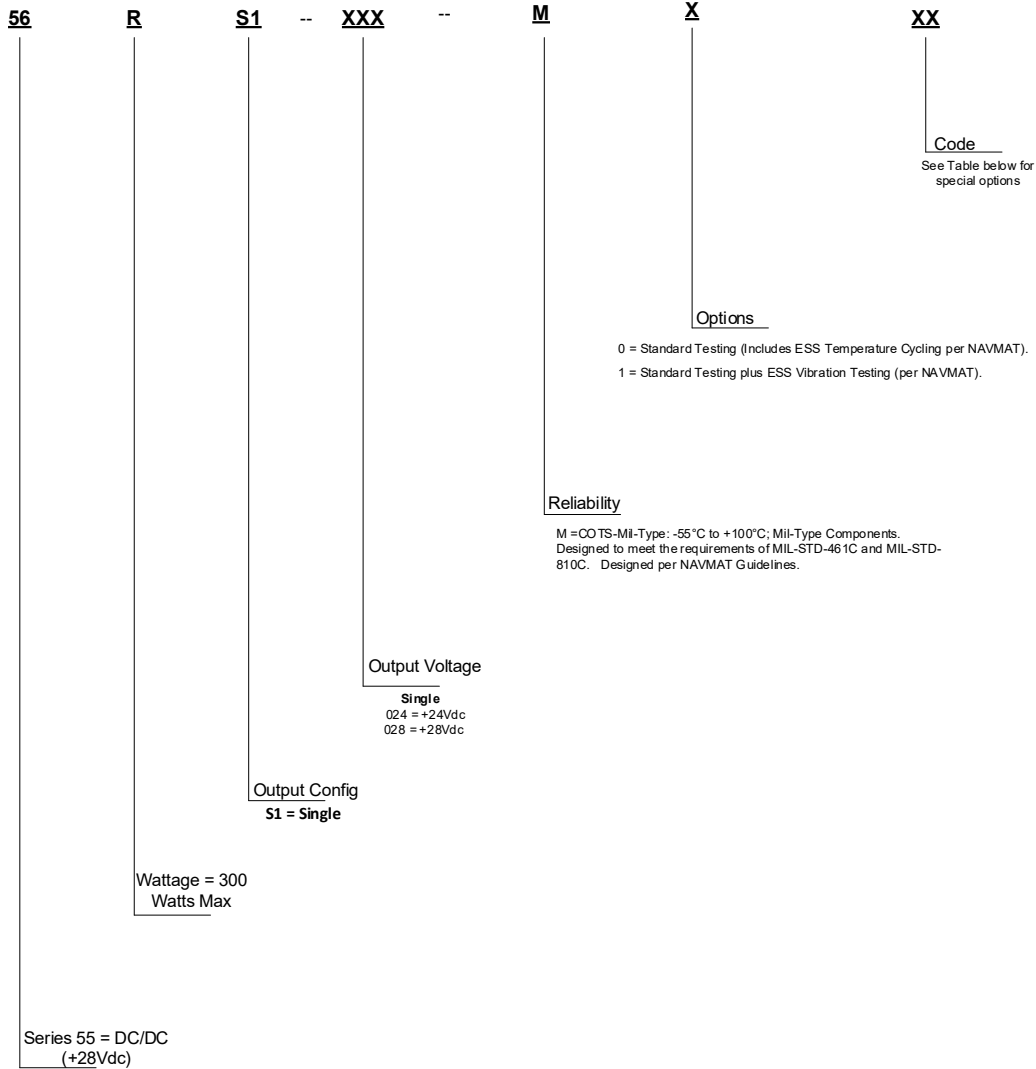

**Example:** 55RS1-028M0 = AC/DC; 300 Watt; Single Output; +28V; COTS-MIL-Type; Standard Testing

**Code Table for Special Orders**

Code	Description
01	Isolation Voltage, 1500 VDC for input to output & input to case; 200 VDC output to case
02	Current Share option installed
03	Model 56RS1-028XX-03: 15 A minimum current limit
05	Model 56RS1-028M1-05 Isolation Voltage: increased to 1500 VDC for input to output and input to case Current Share option installed 15 A minimum current limit 100% vibration screening option