




68INT6 3U OpenVPX™ Single Board Computers

3U OpenVPX™ SOSA™ Aligned SBC with Intel® Core™ i7-118xGRE

Certifiable Processor (Tiger Lake)

The 68INT6 is a high-performance SOSA™-aligned 3U OpenVPX Single Board Computer (SBC) designed with an Intel® Core™ i7-1185GRE (standard) or i7-1186GRE (certifiable) processor /integrated PCH-LP (Tiger Lake) w/ 4 Cores & 12M Smart Cache running up to 2.8 GHz. The 68INT6 can be configured with up to two smart I/O and communications function modules when fitted with the NAI-XMC configuration option. Ideally suited for rugged Mil-Aero applications, the 68INT6 delivers off-the-shelf solutions that accelerate deployment of SWaP-optimized systems in air, land, and sea applications.

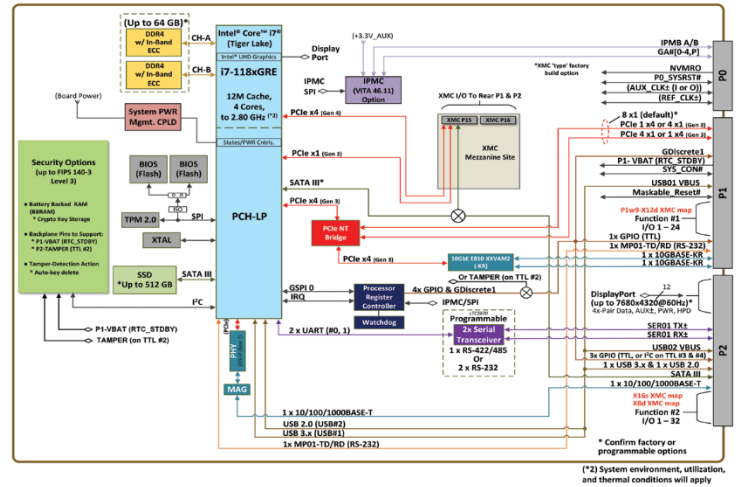


Features Summary

- **Intel® Core™ Processor Type Delivery Options**
 - i7-1185GRE (standard)
 - i7-1186GRE (certifiable)
- **3U OpenVPX (ANSI/VITA 65) SOSA™ Aligned Profiles Supported:**
 - SLT3-PAY-1F1F2U1TU1T1U1T-14.2.16
 - MOD3-PAY-1F1F2U1TU1T1U1T-16.2.15-2
 - Data Plane: 1 x4 or 4 x1 PCIe (Gen 3)
 - Expansion Plane: 4 x1 or 1 x4 PCIe (Gen 3)
 - Combined Planes: 8 x1 PCIe (default) (configurable – contact factory)
 - Control Plane (P1): 2 x 10GBase-KR (1G-KX)
 - Control Plane (P2): 1 x 1GBase-T
 - XMC P1w9-P1w14: or Module-1 I/O (24)
 - XMC P2w9-P2w16: or Module-2 I/O (32)
 - VITA 42 or VITA 61 XMC connectors
 - Video: DisplayPort
 - Up to 7680 x 4320 @ 60 Hz
 - 1 x USB 3.1 Gen 1 & 1 x USB 2.0
 - Off-board Storage I/F: SATA III
- **Processor/Memory**
 - Intel® Core™ i7 11th Gen (Tiger Lake) to 2.8 GHz w/ 4 Cores & 12M Smart Cache; Integrated PCH-LP
 - Up to 64 GB DDR4 SDRAM (2 banks)
 - In-Band ECC memory
 - (up to) 512 GB SATA III NAND Flash
 - Backup-boot NOR FLASH BIOS
- **Security / Cybersecurity (Option)**
 - Up to FIPS 140-3 Level 3 Design Support
 - Crypto-key storage
 - Battery-backed RAM (external V-Bat)
 - Secure Boot
 - Anti-tamper / Tamper Detect & Erasure/Sanitize
- **Motherboard Peripheral I/O**
 - 4 x GPIO (TTL) standard
 - 1 x 422/485 or 2 x RS-232 Ports
 - RS-232 Maintenance Port
- **IPMC Support**
 - VITA 46.11 Tier-2, basic, compatible (configured option)
- **Smart I/O Functions (NAI-XMC Option)**
 - Support for 2 independent modules
 - PCIe interface to function slot #1 (e.g. for 2 additional Gig-E ports option)
 - SATA II interface to function slot #2 (e.g., for 2 TB expansion option)
- **Operating System Support**
 - Wind River® Helix™ Virtualization Platform, Linux, VxWorks® 7, Cert Edition; Windows®; Ubuntu 22.x Linux®, DDC-1 Deos™, Lynx MOSA.ic, Green Hills INTEGRITY-178 tuMP
- **Background Built-in-Test**
 - Continuous BIT (as applicable)
- **COSA® Architecture**
- **Intelligent I/O library support**
- **Commercial or Rugged Applications**
- **Operating Temperature***
 - Commercial: 0°C to +55°C
 - Rugged: -40°C to +85°C
- **Mechanical Options (ANSI/VITA 48)**
 - Air-cooled; 3U, 5 HP/1.0" pitch
 - Conduction-cooled; 3U, 1.0" pitch
- **Power***
 - 55 W (Typical, Maximum).

*Note: Maximum performance and temperature ranges are dependent on system environment, utilization, and thermal conditions; sustained operation at peak loads may not be supported – refer to documentation for specific guidelines

Board Platform NAI-XMC Details

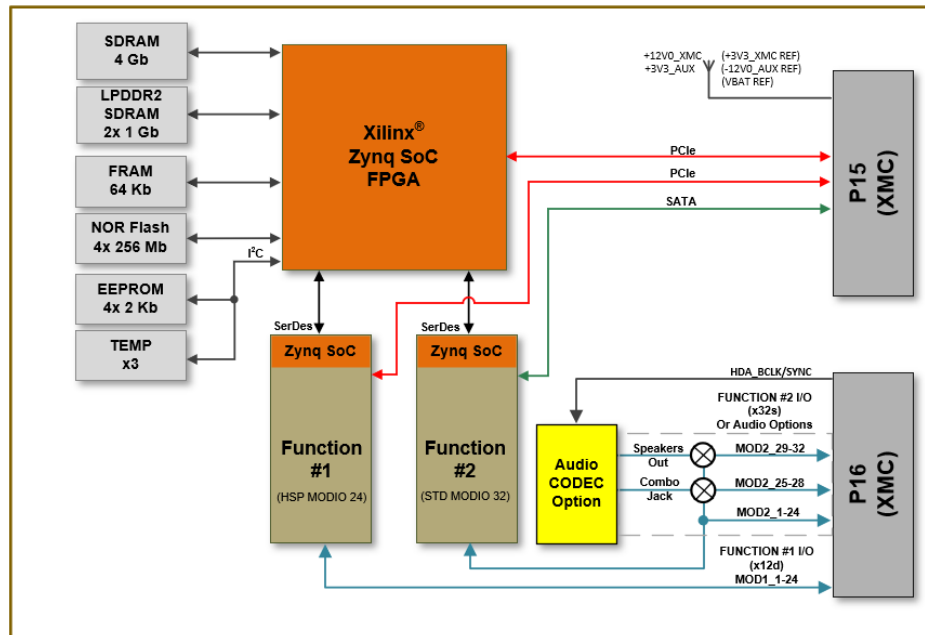

NAI-XMC I/O Block Diagram

Select up to 2 functions for your application (with NAI-XMC configuration option)

For a full listing of 100+ available smart functions and detailed specifications please visit <https://www.naii.com/functions>

I/O Modules
Digital IO Including Differential, Discrete, Relay, TTL/CMOS, Variable Reluctance
Measurement Modules
LVDT / RVDT Measurement, IRIG Timecode Receiver and Generator, Thermocouple and RTD Measurement, Synchro / Resolver Measurement, Strain Gauge Meas.
Communication Modules
ARINC 429/575, CAN bus, Ethernet NIC, MIL-STD-1553, MIL-STD-1760, IEEE- 1394b (FireWire), Serial RS232/422/485
Combination Modules
Multiple Choices of Combinations of I/O and Communications
SSD Expansion Memory
Multiple Choices of High Capacity SATA SSD Expansion Memory

Architected for Versatility

NAI's Configurable Open System Architecture™ (COSA®) offers a choice of over 100 smart I/O, communications, or Ethernet switch functions, providing the highest packaging density and greatest flexibility ruggedized embedded product solutions in the industry. Preexisting, fully-tested functions can be combined in an unlimited number of ways quickly and easily.

One-Source Efficiencies

Eliminate man-months of integration with a configured, field-proven system from NAI. Specification to deployment is a seamless experience as all design, state-of-the-art manufacturing, assembly and test are performed - by one trusted source. All facilities are located within the U.S. and optimized for high-mix/low volume production runs and extended lifecycle support.

Product Lifecycle Management

From design to production and beyond, NAI's product lifecycle management strategy ensures the long-term availability of COTS products through configuration management, technology refresh and obsolescence component purchase and storage



Made in the USA
Certified Small
Business

All specifications are subject to change without notice. All product and company names are trademarks or registered trademarks of their respective holders