

Features

- Multiple I/O and serial communication functions on a single slot, half-size PCI card.
- User can specify 3 different function modules.
- Automatic background BIT testing continually checks and reports the health of each channel.
- I/O via 78-pin D-Sub panel connector
- Designed for both Commercial and Military applications.
- Software Support Kit and Drivers available.



Proudly made
in the USA


Description

The 76C2 is a single slot half-size PCI multi-function I/O and serial communications card. The motherboard contains three independent module slots, each of which can be populated with a function specific module. This enhanced motherboard using multiple DSPs enables higher processing power and dedicated pre-processing and control for each module function. This unique design eliminates the need for multiple, specialized, single-function cards by providing a single-board solution for a broad assortment of programmable, multi-channel signal interface I/O modules such as: Digital (TTL/CMOS, Differential, Discrete, Relay); Analog (A/D, D/A, RTD, Strain Gage, Isolated Power Supply); Positional/Motion Control (Synchro/Resolver/LVDT/RVDT Measurement/ Simulation, AC Reference, Encoder/Counter).

In addition, the 76C2 incorporates communication modules such as RS-232/422/423(188C)/485, MIL-STD-1553, CANBus and ARINC 429/575. This approach increases packaging density, saves enclosure slots and reduces power consumption.

Additional enhancements include FIFO data buffering for A/D, D/A, S/D and LVDT functions. (Please see all available functions on the following page.)

NAI's flexible, leading-edge, fully programmable and continuous background built-in-test (BIT) feature is always enabled and continually checks the health of each channel. If a fault is detected, it is immediately reported and the specific channel is identified with no downtime for troubleshooting. Testing is totally transparent to the user, requires no external programming, and has no effect on the standard operation of the card.

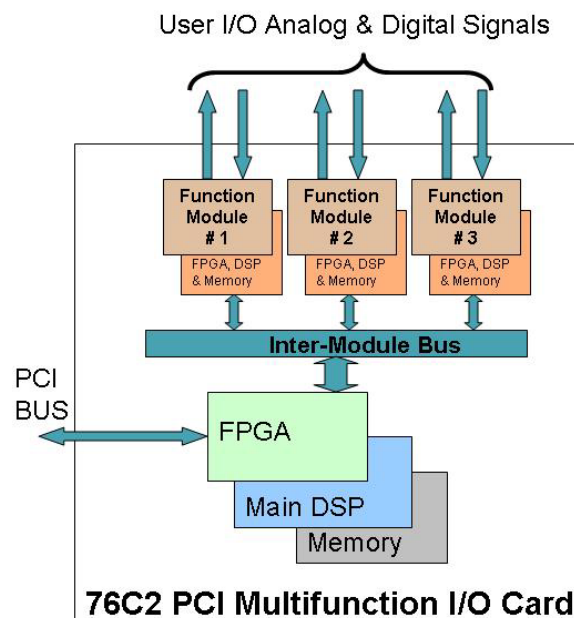



General Board Specification

- Power: +5VDC, ± 12VDC (for select modules)
- Size: 106.7mm x 20mm x 167.8mm (half size PCI)

- Operating Temp: 0° C to 70° C or -40° C to 85° C

Available Function Modules

(GEN2 Platforms)

Note 1 – Indicates wide selection (See part number in Operations Manual)
Note 2 – Contact factory for availability

	Module	Channels	Input Scaling	Resolution	Accuracy (±)	Sampling (programmable)
A/D Converter	C1	10	±1.25,2.5,5 or 10 VDC	16 bit	0.05% FS	200 KHz max
	C2	10	±5,10,20 or 40 VDC	16 bit	0.1% FS	200 KHz max
	C3	10	0-25 mA	16 bit	0.1% FS	200 KHz max
	C4	10	±6.25,12.5,25 or 50 VDC	16 bit	0.1% FS	200 KHz max
	CA	10	(Channels 1-6 are C2 type and Channels 7-10 are C3 type)			
D/A Converter	F1	10	±10 or 0-10 VDC	16 bit	0.05% FS	15µs max
	F3	10	±5 or 0-5 VDC	16 bit	0.05% FS	10µs max
	F5	4	±25 or 0-25 VDC	16 bit	0.05% FS	10µs max
	J3	10	±1.25 or 0-1.25 VDC	16 bit	0.05% FS	10µs max
	J5	10	±2.5 or 0-2.5 VDC	16 bit	0.05% FS	10µs max
	J8	4	±20 to ±100 VDC	16 bit	0.15% FS	350µs max
RTD	G4	6	Update rate 16.7 Hz/channel	Resolution 16 bit	Accuracy (±) (±) 0.05% FS	Interface 2, 3 or 4 wire
Strain Gage	G5 ²	4	Update rate 4.7 Hz – 4.8 KHz	Resolution 16 bit	Accuracy (±) (±) 0.1% FS	Interface Conventional 4-Arm Bridge
Encoder/Counter	E7	4	Signal Voltage RS422 / 24 VDC	Resolution 32 bit	Modes Encoder (SSI, A-Quad-B), Counter (up/down)	
L(R)VDT/D	L ¹	4	Frequency 360 Hz to 20 KHz	Resolution 16 bit	Accuracy (±) 0.025% FS	Interface 2 or 3/4 wire
SYN(RSL)/D	S ¹	4	Frequency 50 Hz to 20 KHz	Resolution 16 bit	Accuracy (±) 1 arc-min	Tracking Rate 190 RPS
D/SYN(RSL)	6 ¹	3	Frequency 47 Hz – 10 KHz	Resolution 16 bit	Accuracy (±) 0.1°	Power 0.25 VA / channel
D/L(R)VDT	5 ¹	3	Frequency 47 Hz – 10 KHz	Resolution 16 bit	Accuracy (±) 0.2% FS	Power 0.1 VA / channel
I/O, TTL/CMOS	D7	16	Input Range 0 – 5.5 V	Output level TTL/CMOS	Programmable Input or Output	
I/O, Differential	D8	11	Input Range (422) -10V to +10V	Input Range (485) -7V to +12V	Output Range (422/485) -0.25V to +5V	
I/O, Discrete	K6 (v4)	16	Input Range 0 – 60 VDC	Output Range 0 – 60 VDC	Programmable Input or Output	Notes (500 mA – 2 A) (source/sink)
	K7	12	±80V	±80V	Input or Output	Isolated switch (600mA)
Relay	KN ² , KL ²	4	Type DPDT (1 CH Form C)	SW Volt/Current 220V / 2A (max)	SW Power (max) 60W / 62.5 VA	Notes KN=non-latch, KL=latching
Serial Communications	P8	4	HW Interface levels support RS-232/422/423(MIL-STD-188C)/485		Bit rate (Async/Sync) 1 / 4 Mbit/s per Ch.	Tx/Rx Buffer 32KB
						Notes Partial modem
CANBus	P6, PA	4	CAN protocol P6= 2.0A/B / PA=J1939	Message Buffer 16K RX/TX	Data rate (Prog) 1 Mb/s max.	Notes Bosch® IP Core
MIL-STD-1553	N7, N8	2	Operational Modes BC,RT, BM, BM/RT	Onboard RAM 128Kbyte per ch	Bus Coupling Configuration N7 = Transformer / N8 = Direct	
ARINC 429/575	A4	6	Frequency 100 KHz or 12.5 KHz	Input/output RX/TX	Message Buffer 256 word Tx/Rx	
DC Power Supply	V1, V2	1, 2	Voltage Output +/- 15V	VOut Regulation +/- 1%	Current Output +/- 450 mA(max)	
AC Reference	W ¹	1	Frequency 47 Hz – 20KHz	Accuracy +/- 3%	Voltage 2 – 115 VRMS	Power 6 VA

Part Number Designation

76C2 – XX XX XX X X-XX

Slot # 1 2 3

MODULE (SLOT) DEFINITION

Enter Module (designation, i.e. C1) for each one of Slots 1, 2 & 3;
enter a "Z0" if slot is not to be populated

ENVIRONMENTAL

C = 0 TO 70°C

H = -40 TO +85°C with conformal coating

K = C with conformal coating

ENCODER OUTPUTS FOR SYNCHRO / RESOLVER MODULES

0 = No Encoder outputs

1 = Encoders included for each specified Synchro/Resolver module

SPECIAL OPTION CODE (OR LEAVE BLANK)

For detailed specifications & complete part number designation, visit www.naii.com to download Operations Manual.

For Ordering Information:

Phone – 631-567-1100

Fax – 631-567-1823

E-mail – sales @naii.com