



SIU31 Rugged COTS Systems


3U cPCI Sensor Interface Unit

**Configure with up to three I/O and communication function modules—
Over 100 different modules to choose from**

The SIU31 is a highly configurable Rugged COTS System or subsystem ideally suited for military, industrial, and commercial applications that require high-density I/O, communications, Ethernet switching, and processing. The SIU31 uses one NAI field-proven, 3U cPCI board to deliver off-the-shelf, SWaP-optimized COTS solutions that Accelerate Your-Time-to-Mission™.



Mix-and-Match Modular Architecture

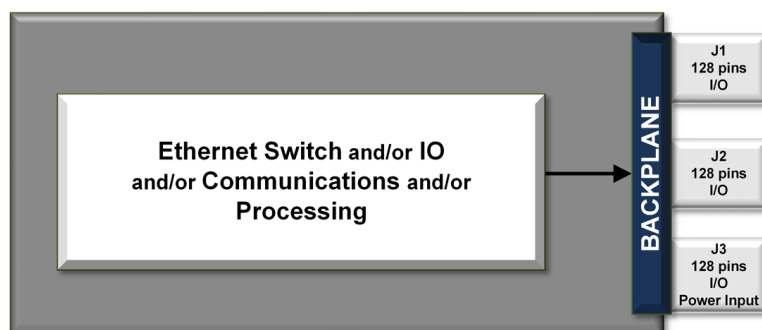

Features

- COSA® Architecture
- 1x 3U cPCI or OpenVPX™ Card Slot
 - Supports up to 3 I/O and/or Communication smart functions
 - 100+ modules to choose from
- SBC-less stand-alone operation supported via Ethernet connection to your mission computer
- Processor Options: Freescale PowerPC™ QorIQ® P2041, Intel® Core™ i7 or ARM® Cortex®-A9
- COTS/NDI Sense & Response system
- Fast Boot Capability
- Customer Configurable I/O, Communications and Processing
- Reduced SWaP Footprint
 - Conduction (CC) or Air (AC) Cooled Versions
 - 2.35" x 8.70" x 4.71" (incl. connectors)
 - 28 VDC input
- Wind River® Linux, VxWorks®, Xilinx® PetaLinux and Windows® Embedded Standard 7 OS support
- Continuous Background Built-In-Test (BIT)
- Specifications
 - Operating temp: -40°C to +71°C @ thermal interface, conduction cooled
 - Environmental/EMI
 - MIL-STD-461*
 - MIL-STD-810
 - MIL-STD-1275
 - MIL-STD-704

*MIL-STD-461F requires properly shielded cables and system grounding practices.

Select up to 3 independent functions for your application with up to 1 card slots

I/O Boards and Single Board Computers					
Type	Model	Description	Type	Model	Description
Single Board Computers	75ARM1	3U cPCI ARM Cortex-A9 Based Single Board Computer	Multifunction I/O Boards	75D4	cPCI-3U Multifunction I/O with Integrated High Speed Serial (RS-232/422/423/485) and Discrete I/O
	75ARM1	3U cPCI ARM Cortex-A9 Based Single Board Computer		75G5	3U cPCI MFIO Board
	75INT2	3U cPCI Intel i7 Based Single Board Computer		75G5	3U cPCI MFIO Board
	75INT2	3U cPCI Intel i7 Based Single Board Computer	Single Function I/O Boards	75DL1	cPCI-3U Digital-to-LVDT Simulation Motherboard
	75PPC1	3U cPCI PPC 2041 Based Single Board Computer		75DS1	cPCI-3U Digital-to-Synchro/Resolver Simulation Motherboard
	75PPC1	3U cPCI PPC 2041 Based Single Board Computer		75DS2	cPCI-3U Digital-to-Synchro/Resolver/LVDT Simulation Motherboard
Multifunction I/O Boards	75C3	cPCI-3U Multifunction I/O Board	Rugged Power Supplies	75PS4	Power Supply Unit, 3U cPCI
	75C5	cPCI-3U Multifunction I/O Board			
Smart Function Module					
Type	Module Category		Type	Module Category	
Measurement & Simulation Modules	AC Reference		Communication Modules	MIL-STD-1553B	
	Chip Detector and Fuzz Burn			MIL-STD-1760	
	LVDT RVDT Measurement and Simulation			Serial Communications	
	Strain Gauge Measurement			Time-Triggered Ethernet	
	Synchro Resolver Measurement and Simulation		I/O Modules	Analog-to-Digital	
	Thermocouple and RTD Measurement			Digital IO - Differential Transceiver	
	Variable Reluctance			Digital IO - TTL,CMOS	
Communication Modules	ARINC Communications			Digital-to-Analog	
	CANBus Communications			Discrete IO - Multichannel,Programmable	
	Ethernet NIC Interface			Relay	
	Ethernet Switch		Combination Modules	MIL-STD-1553B, Discrete IO - Multichannel,Programmable	
IEEE 1394 (FireWire)		MIL-STD-1553B, ARINC Communications			

Architected for Versatility

NAI's Configurable Open Systems Architecture™ (COSA®) offers a choice of over 100 smart I/O, communications, or Ethernet switch functions, providing the highest packaging density and greatest flexibility of ruggedized embedded product solutions in the industry. Preexisting, fully-tested functions can be combined in an unlimited number of ways quickly and easily.

One-Source Efficiencies

Eliminate man-months of integration with a configured, field-proven system from NAI. Specification to deployment is a seamless experience as all design, state-of-the-art manufacturing, assembly and test are performed - by one trusted source. All facilities are located within the U.S. and optimized for high-mix/low volume production runs and extended lifecycle support.

Product Lifecycle Management

From design to production and beyond, NAI's product lifecycle management strategy ensures the long-term availability of COTS products through configuration management, technology refresh and obsolescence component purchase and storage.

All specifications are subject to change without notice. All product and company names are trademarks or registered trademarks of their respective holders

